



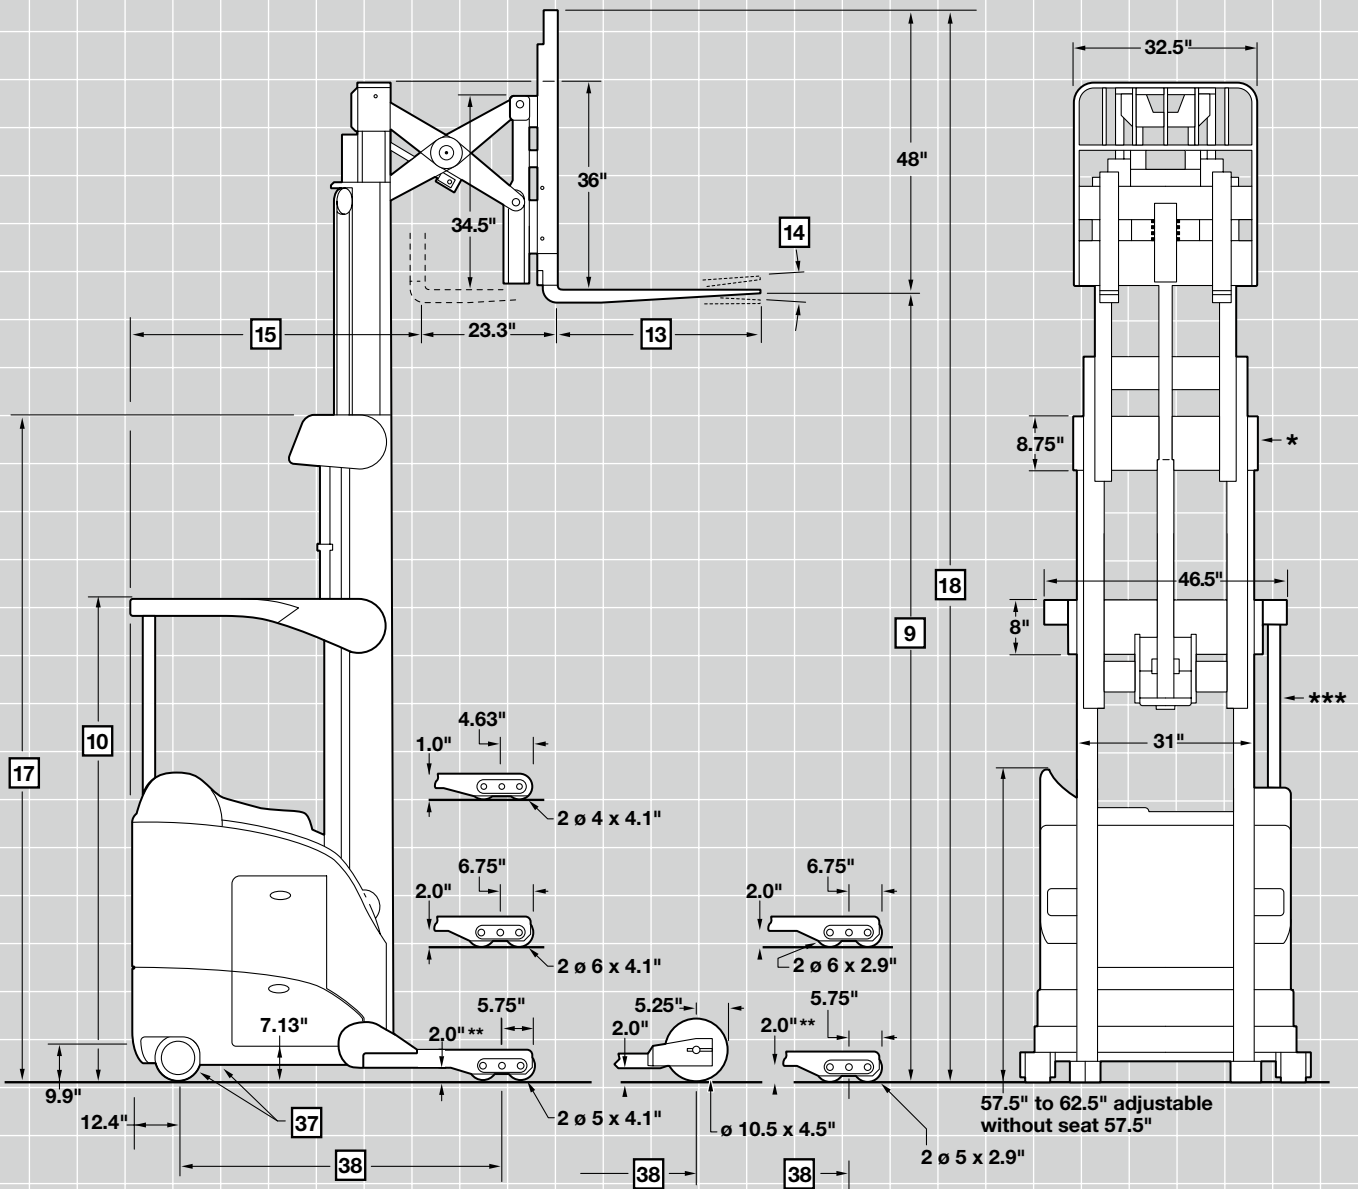

RR 5700 S Series

Profile Sheet

RR 5700 S Series

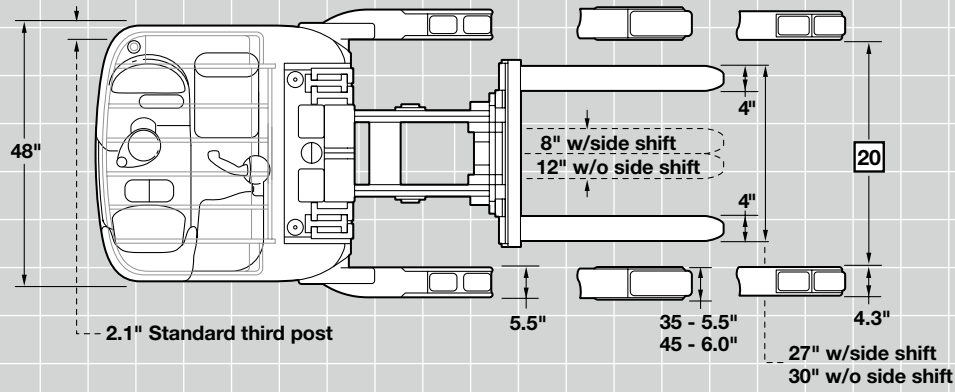

* Top tie bar width – 33" for 240" or 270" lift. 35" for 300" and above.
 ** 1.0" on lift heights above 321"
 *** Standard third post location, refer to dimension in top view.

RR 5700 S Series

General Information	1	Manufacturer		Crown Equipment Corporation	
	2	Model		RR 5795S	
	3	Load Capacity*	Max	lb 4500	
	4	Load Center	Fork Face to Load CG	in 24	
	5	Power		36 Volts	
	6	Operator Type	Reach	Sit/Stand	
	7	Tire Type	Load/Caster/Drive	Poly/Poly/Poly	
	8	Wheels (x = driven)	Load/Power Unit	4 / 2 (1x)	
Dimensions		Mast Type	High Visibility	TT	
	9	Lift Height		in See Mast Chart	
	10	Guard Height		in See Mast Chart	
	13	Forks	Standard L x W x T	in	36 x 4 x 1.75
			Optional Lengths	in	30, 39, 42, 45, 48
	14	Carriage	Tilt F°/B°	degree	3 / 4
	15	Headlength**	Comp't "C"	in	54.91
			Comp't "D"	in	56.66
			Comp't "E"	in	59.28 / 64.03†
	17	Overall Collapsed Height		in	See Mast Chart
18	Overall Extended Height		in	See Mast Chart	
20	Inside Straddle Width	In 1" increments	in	34 - 50	
Chassis	37	Tires	Size - Drive/Caster	in	13 x 5.5 / 8.5 x 2.7 x (2)
	38	Wheelbase (Standard Wheel)	Comp't "C"	in	59.57
			Comp't "D"	in	61.32
			Comp't "E"	in	63.95 / 68.7†
	39	Suspension	Drive		Articulated
			Caster		Articulated, Swivel
42	Brakes	Drive		Elec Release/Mech Applied	
		Caster		Electronically Applied	
		Parking		Elec Release/Mech Applied	
Battery		Battery Removal			Drive Side
	45	Type			Lead Acid
	46	Min Weight/Max Amp	Comp't "C"	lb/amp	2000 / 930
			Comp't "D"	lb/amp	2280 / 1085
			Comp't "E" ≤ 400"	lb/amp	2600 / 1240
			Comp't "E" 401-442"	lb/amp	2800 / 1240
		Max Battery Size	Comp't "C"	in	16.25 x 38.38 x 31
Comp't "D"			in	18.00 x 38.69 x 31	
Comp't "E"			in	20.75 x 38.69 x 31	

* Contact factory. Capacity may be subject to derating at height.

** Add 2" with optional sideshift.

† 442" Lift Height

RR 5700 S Series

		TT						
Mast	9	Lift Height	198"	210"	240"	270"	300"	321"
		Free Lift*	41	47	59	71	83	92
	10	Guard Height	89	95	95	95	95	95
	17	Overall Collapsed Height	89	95	107	119	131	140
	18	Overall Extended Height*	246	258	288	318	348	369
		Minimum Straddle OD	42	42	42	42	42	42
Weight	Truck Weight w/o Battery		Battery Compartment					
	RR 5795S	"C" lb	6167	6276	6589	6879	7386	7562
		"D" lb	6217	6326	6639	6929	7436	7612
		"E" lb	6272	6381	6694	6984	7491	7667

		TT					
Mast	9	Lift Height	341"	366"	400"	421"	442"
		Free Lift*	101	112	124	130	142
	10	Guard Height	95	95	95	95	95
	17	Overall Collapsed Height	149	160	172	178	190
	18	Overall Extended Height*	389	414	448	469	490
		Minimum Straddle OD	49	50	53	53	53
Weight	Truck Weight w/o Battery		Battery Compartment				
	RR 5795S	"C" lb	na	na	na	na	na
		"D" lb	7969	na	na	na	na
		"E" lb	8024	8240	8474	8942	9305

*With load backrest.
Above 321", 6" high load wheel standard.



Crown Equipment Corporation
New Bremen, Ohio 45869 USA
Tel 419-629-2311
Fax 419-629-3796
crown.com

You can count on Crown to build lift trucks designed for safe operation, but that's only part of the safety equation. Crown encourages safe operating practices through ongoing operator training, safety-focused supervision, maintenance and a safe working environment. Go to crown.com and view our safety section to learn more.

Because Crown is continually improving its products, specifications are subject to change without notice.

Crown, the Crown logo, the color beige, the Momentum mark, Access 1 2 3, InfoPoint, InfoLink, ThermoAssist, OnTrac and Work Assist are trademarks of Crown Equipment Corporation.

Copyright 2009 Crown Equipment Corporation
SF18380-1 7/09
Printed in U.S.A.